



# OZ Optics

shop.ozoptics.com  
www.ozoptics.com

219 Westbrook Road  
Ottawa, ON, Canada, K0A 1L0

Toll-free: 1-800-361-5415  
Telephone: 1-613-831-0981  
Fax: 1-613-836-5089  
sales@ozoptics.com

## FIBER LENGTH METER

### Features and Benefits

- Measures lengths from a few mm up to 500 m
- Better than 2 mm resolution
- Less than 0.1% measurement error
- No dead zone. Can measure fibers less than 1 cm long
- Absolute and relative measurements
- Works with singlemode, multimode, polarization maintaining, and specialty fibers
- Continuous (1 Hz) measurements of optical fiber lengths
- Saves time spent manually measuring fiber lengths
- Improves quality control
- Portable benchtop units


### Applications

- Optical fiber cable assembly
- Production testing
- Optical network field installations
- Quality control and acceptance testing
- Fiber optic sensor assembly and testing
- Low-cost dynamic strain sensor
- Construction of fiber interferometers
- Fiber laser manufacturing
- Cable management

### Product Description

The OZ Optics Optical Fiber Length Meter (OFLM-1000) delivers fast, accurate and reliable measurements of optical fiber lengths. This powerful tool saves time and money while preventing measurement errors and improving quality control.

With resolution better than 2 mm and repeatability of less than 3 mm, the OFLM-1000 delivers highly accurate optical path length measurements for distances up to 500 m. The system reports and records its measurements to any Windows based personal computer, allowing easy data logging and report writing.

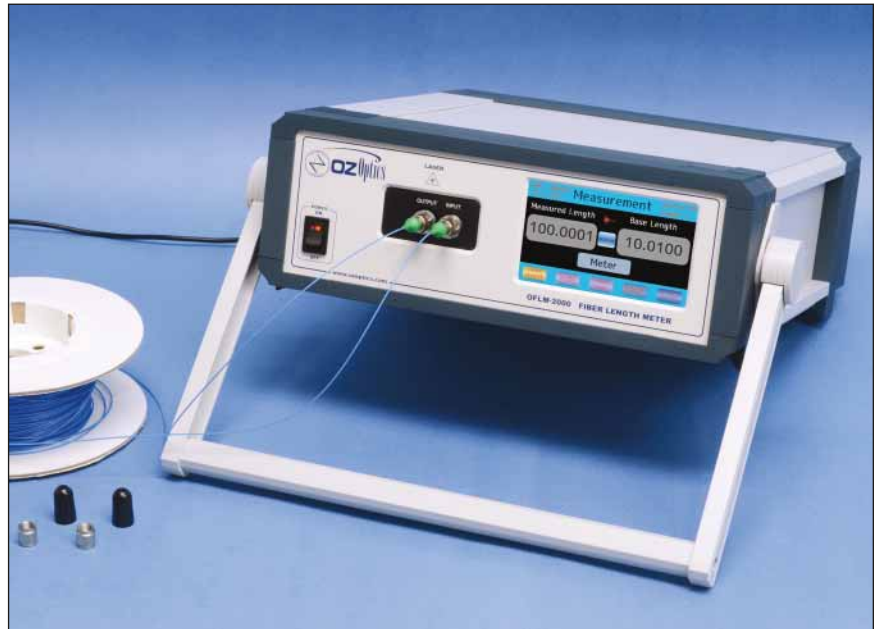

Fiber Length Meter

For any application requiring precise and well-controlled optical fiber lengths, the OFLM-1000 saves time and money while improving quality and performance. You will find the OFLM-1000 to be an innovative and essential tool.

The OFLM-1000 is an essential tool for constructing and testing fiber optic cables, fiber optic sensors, fiber optic interferometers, and other optical fiber systems where length must be controlled. Take your optical fiber systems to the next level of quality and cost control with the OFLM-1000 today.

Please **Contact OZ** with your optical fiber length and strain monitoring requirements.

## Standard Product Specifications:

### Optical Specifications (Single-Port Option)

Parameter	Value	Comments
Fiber types that could be measured	Singlemode fiber with 3.5 micron and larger cores, PM fiber with 3.5 micron and larger cores, Multi-mode fibers.	Separate models required for multimode fibers larger than 62.5/125.
Resolution	<2 mm	
Repeatability	<3 mm	
Accuracy <sup>1</sup>	$\pm(0.1\% L + 1.5 \text{ mm})$ , where L is fiber under test length.	Accuracy is affected by variations in the fiber index of refraction which is set by the user.
Optical connector	Super FC/PC standard	Other connectors available on request.
Minimum distance	<1 cm	
Maximum distance	150 m	

### Optical Specifications (Dual-Port Option)

Parameter	Value	Comments
Fiber types that could be measured	Singlemode fiber with 3.5 micron and larger cores, PM fiber with 3.5 micron and larger cores, Multi-mode fibers.	Separate models required for multimode fibers larger than 62.5/125.
Resolution	<4 mm	
Repeatability	<3 mm	
Accuracy <sup>1</sup>	$\pm(0.1\% L + 1.5 \text{ mm})$ , where L is fiber under test length.	Accuracy is affected by variations in the fiber index of refraction which is set by the user.
Optical connector	Super FC/PC standard	Other connectors available on request.
Minimum distance <sup>2</sup>	<1 cm	
Maximum distance <sup>3</sup>	500 m	

### Electrical Specifications

Parameter	Value	Comments
Power requirements	120 V or 240 V AC, 50/60Hz	
Operating current	1 Amp	
Computer Interface	USB	

### Environmental Specifications

Parameter	Value	Comments
Operating Temperature	0 to 40 °C	
Storage Temperature	-20 to 60 °C	

Note: 1. Assume user uses a calibrated index of refraction based on the same type of fiber.

2. For measuring fiber lengths less than one (1) meter, a one meter patch cord of the same type of fiber is required to set a known length value into "Base Length."

3. Above specifications are qualified for a fiber length up to 330 meters, and with SM fiber only.

## Ordering Information for Standard Parts

Bar Code	Part Number	Description
56095	OFLM-1000-1-S-3-U	Single port, benchtop, Optical Fiber Length Meter for singlemode or polarization maintaining fibers, or multimode fibers up to 62.5/125 microns with an ultra PC finish FC connector receptacle, with USB computer interface.
56096	OFLM-1000-2-S/M-3-U	Dual port, benchtop, Optical Fiber Length Meter for singlemode, polarization maintaining, or large core multimode fibers, with ultra PC finish FC connector receptacles, with USB computer interface.

## Ordering Information for Custom Parts:

### Optical Fiber Length Measurement System: **OFLM-A-B-E-X-(I)**

**A** = Configuration:  
1000 for benchtop unit

**B** = # of ports:  
1 (1 port)  
2 (2 ports)

**E** = Fiber Type:  
S for singlemode or polarization maintaining fibers, and multimode fiber up to 62.5/125  
M for large core multimode fibers  
S/M for both (for the case of Dual-Port System)

**I** = Computer Interface  
U: USB interface

**X** = Receptacle Code  
3 = FC (Compatible with super PC and ultra PC finishes)  
SC = SC receptacle  
LC = LC receptacle

## Frequently Asked Questions (FAQs):

**Q:** How does the fiber length meter work?

**A:** For the single port option, it calculates the fiber length by measuring the phase difference between the launch pulse and the reflected signal from the end of the fiber.

For the dual port option, it calculates the fiber length by measuring the phase difference between the launched pulse and the detected pulse.

**Q:** What is the operating wavelength of the device?

**A:** The wavelength of operation is in the range of 620 nm to 690 nm.

**Q:** Can the optical fiber length meter be implemented to operate at a different wavelength?

**A:** No. However, it will work with fibers designed for any wavelength.

**Q:** Can the length of patchcords with connectors other than the standard super FC/PC be measured?

**A:** Yes. The device could be implemented with the connector type the customer orders.

**Q:** Can the user measure the length of any assembled patchcord?

**A:** It depends on which of the two options the user orders.

For the single port option, the end of the fiber under test must be flat cleaved or polished in order for the reflected light to be sufficient for detection. If not, the device will not function.


For the dual port option, both ends of the fiber under test must be accessible. In this case, the end finish or cleave is not an issue.

**Q:** Can we measure optical fibers longer than 500 m?

**A:** For a Dual-Port version of the instrument, 500 meters should be considered to be the upper limit (based on a fiber with a 9 micron core), although it might be able to measure fibers that are very slightly longer than 500 meters operating under ideal conditions. Depending on the properties of the fiber being measured, the limit might be less. Similarly, for a Single-Port version, 150 meters is the upper practical limit. The actual limit depends on the core size and the cleave or polish at the far end of the fiber.

**Q:** What does the OZ-OFLM user interface look like?

**A:** The main GUI screen will look as follows:

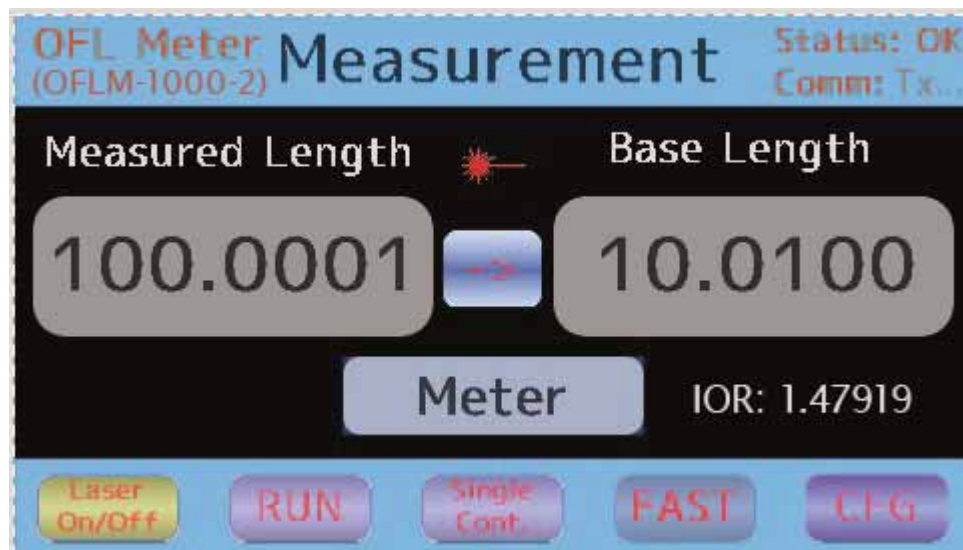

Laser Radiation  
Avoid exposure to beam  
CLASS 2 LASER PRODUCT  
Based on IEC 60825-1 2007-03  
0.95 mW MAX OUTPUT AT 620-690 nm