
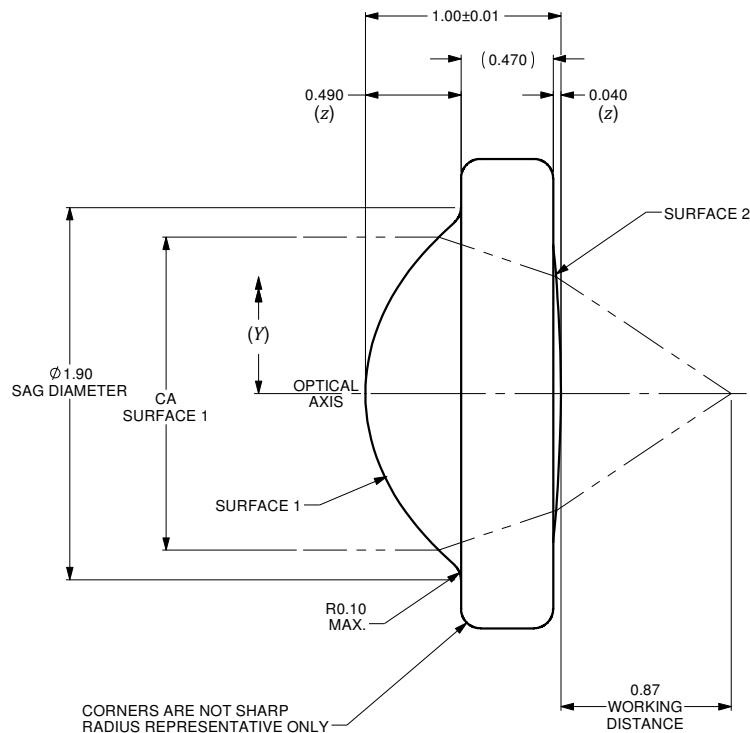


$$z = \frac{Y^2}{R \left( 1 + \sqrt{1 - (1+k) \frac{Y^2}{R^2}} \right)} + A_4 Y^4 + A_6 Y^6 + \dots + A_n Y^n$$

	SURFACE 1	SURFACE 2
SURFACE TYPE	ASPHERIC	ASPHERIC
CLEAR APERTURE (CA)	ø1.60mm	ø1.20mm
RADIUS OF CURVATURE	0.93244mm	-5.1384mm
<i>k</i>	-0.77603	0
<i>A<sub>4</sub></i>	3.45054E-002	13.19146E-002
<i>A<sub>6</sub></i>	3.57196E-002	-18.08095E-002
<i>A<sub>8</sub></i>	-8.25538E-002	12.62976E-002
<i>A<sub>10</sub></i>	13.19978E-002	-20.44727E-002
<i>A<sub>12</sub></i>	-10.38591E-002	14.74485E-002
<i>A<sub>14</sub></i>	0	0

VARIABLES	
<i>z</i>	SURFACE PROFILE
<i>Y</i>	DISTANCE FROM OPTICAL AXIS
<i>R</i>	RADIUS OF CURVATURE
<i>k</i>	CONIC CONSTANT
<i>A<sub>4</sub></i>	4th ORDER ASPHERIC COEFFICIENT
<i>A<sub>6</sub></i>	6th ORDER ASPHERIC COEFFICIENT
<i>A<sub>n</sub></i>	nth ORDER ASPHERIC COEFFICIENT

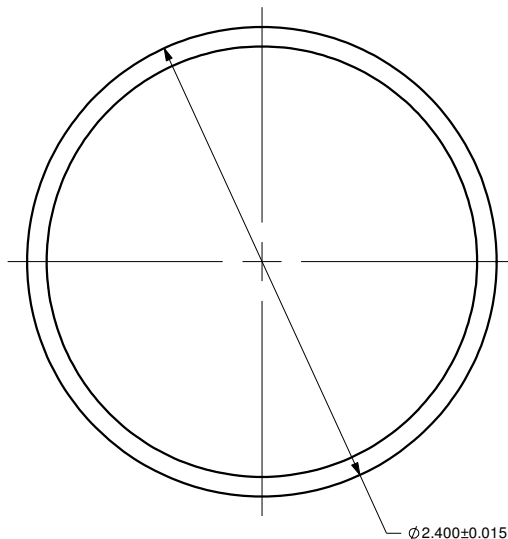

NUMERICAL APERTURE	0.56
EFFECTIVE FOCAL LENGTH	1.44mm

**NOTES :**

- MATERIAL: D-ZK3
- WAVEFRONT ABERRATION (RMS): <0.08λ @ 632.8nm
- AR COATING: 375-650 nm  
REFLECTIVITY R<sub>avg</sub> ≤0.50%

ALL DIMENSIONS ARE IN MILLIMETERS		A	N/A	ORIGINAL ISSUE	C.M.	16-SEP-2019	
DRAWN BY: P. SUMMERS	DATE: 9/16/2019	REV.	ECR REF#	DESCRIPTION	ENG. BY	DATE	
CHECKED BY:	DATE:	UNLESS NOTED OTHERWISE, DIMENSIONS ARE IN MILLIMETERS. INCHES ARE IN SQUARE BRACKETS AND TOLERANCES APPLY AS SHOWN BELOW.				PART BARCODE #: 3103	
M/S CHECKED BY:	DATE:	INCHES				219 WESTBROOK ROAD OTTAWA, ONTARIO CANADA K0A 1L0	
AP/VD BY:	DATE:	MILLIMETERS				www.ozoptics.com	
PROJECTION:		ANGULAR DIMENSIONS				ASPHERIC LENS f=1.44mm, OD=2.4mm. AR COATED FOR 375-650nm	
CONFIDENTIAL THIS PRINT IS THE EXCLUSIVE PROPERTY OF OZ OPTICS AND MUST BE RETURNED UPON REQUEST. UNAUTHORIZED USE, MANUFACTURE OR REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED.		PART NO.:				REV. A	
SURFACE FINISH		MILLED		PROFILED	SIZE: B	DWG.# 4000-0204	
		125μ		63μ	SCALE: 40:1	SHEET 1 OF 1	