


⋖

4000-0433



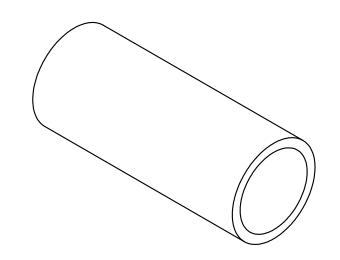

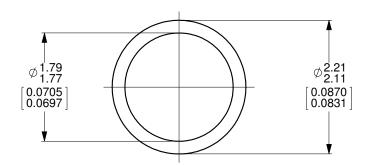

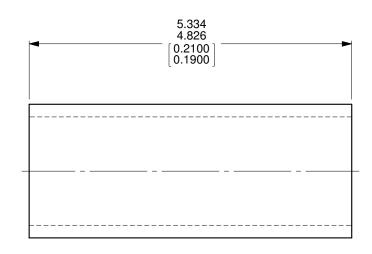

		Α	N/A	ORIGINAL IS	SUE				C.M.	24-OCT-2019
ALL DIMENSIONS ARE IN MILLIMETERS		REV.	ECR REF#	DESCRIPTION	N				ENG. BY	DATE
DRAWN BY:	DATE:		OTED OTHERWISE,						PART	
P. Summers	10/24/2019	SQUARE BRACKETS, AND TOLERANCES			1 OPTI	BARCODE #.				
CHECKED BY: DATE:		APPLY AS SHOWN BELOW. INCHES			Or Ca	77	ntiag	OTTAWA, ONTARIO CANADA K0A 1L0	1928	
MO OUEQUED DV	DATE:	BASIC DECIMAL PLACES DIMENSION .XX .XXX		- ( <del></del> ) [						
M/S CHECKED BY:	DATE.	BELOW 4 OVER 4	±.01	±.005 ±.01			www.	ozoptics.com		
APVD BY:	DATE:	MILLIMETERS			DESC.					
		BASIC DECIMAL PLACES DIMENSION X XX			STRAIN RELIEF SLEEVE FOR					
		BELOW 101.6 OVER 101.6		±.10	1.8mm FERRULES					
		ANGULAR DIMENSIONS								
		BASIC	X	X.X	PART NO.		a			REV
CONFIDENTIAL THIS PRINT IS THE EXCLUSIVE PROPERTY OF OZ OPTICS AND MUST BE RETURNED UPON REQUEST. UNAUTHORIZED USE, MANUFACTURE OR REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED.		ALL ANGLES				SLEEVE-1.8				A
		SURFACE			SIZE: D'	ZE: DWG.#				
		FINISH	MILL	ED PROFILED	B B	4000	)-0433	SHEET 1 OF 1	SCALE:	16:1

MATERIAL: 303 STAINLESS STEEL OZ Optics reserves the right to change any specification without prior notice.